

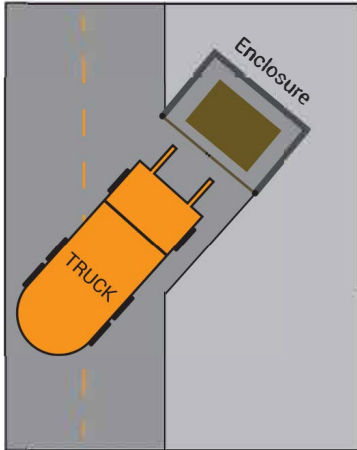


DIRECT ACCESS

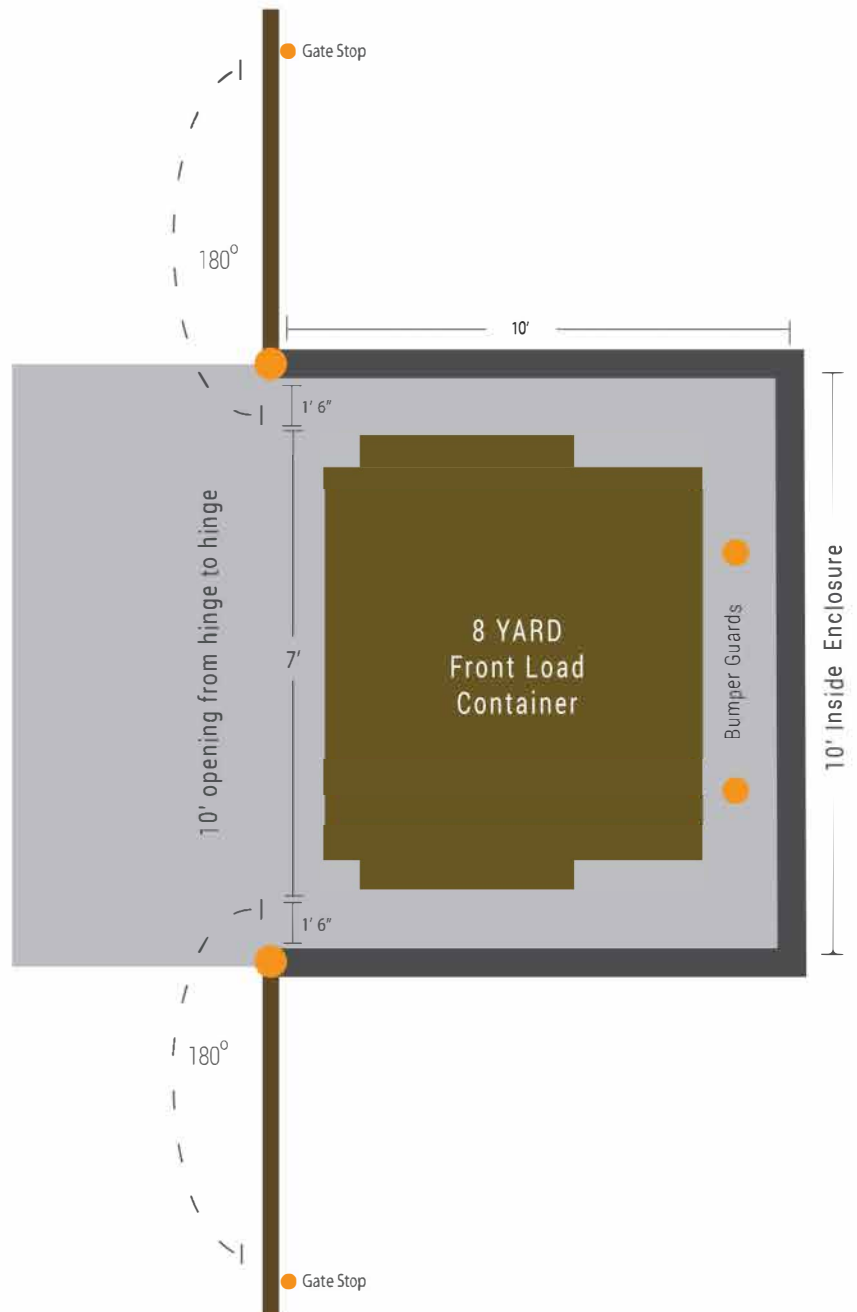

NON-DIRECT ACCESS

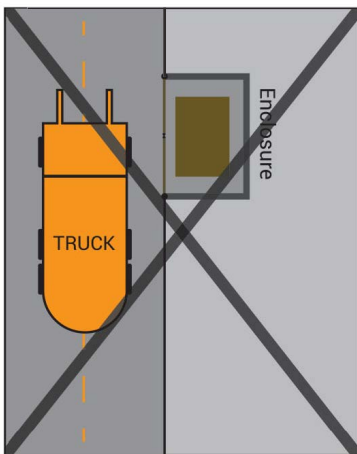

Gate Opening - Not all containers have wheels, so the truck will need room to drive into the enclosure & dump your container. Gate openings should have a minimum of a 10 foot opening; & hinges on the *outside* of the wall.

Gate Stops - Please be sure to install gate stops to hold gates open when we dump the container!

Depth of Enclosure - Allow a minimum of 10 feet for a front load container, & a minimum of 16 feet for a rear load containers.

Enclosure depth can be smaller for smaller containers! Consult your sales representative to determine what type of container & enclosure will best meet your company's needs.

Truck Access - Please leave 40 feet of unobstructed clearance in front of the enclosure to allow our truck direct access to your container!

Spacing - Leave room for employees to walk on each side of your dumpster. A side opening is also recommended so employees do not have to open the large entry door.

Building Material - Chain link is recommended for enclosures, because the hinges are adjustable as the ground settles. Consult your municipality for fencing & height requirements. There should be a 6 inch thick concrete pad inside the enclosure, & at least 8 feet in front of the enclosure opening. This helps to reduce damage to both the pavement & the trucks.

Please contact your sales representative with any additional questions; We're happy to help you design your company's new home for our dumpsters!